



Mitigating Nutrient Impacts on a Stressed Watershed Through Construction of a New Ocean Outfall

Anastasia Rudenko | GHD
Lenna Quackenbush | GHD

NEWEA 2020

Session overview


- 1 Background
- 2 Planning
- 3 Design
- 4 Construction



Background


Rehoboth Beach, Delaware

- Seasonal community
- Winter population under 1,500
- Summer population peaks around 25,000
- Over 100,000 beach visitors on any given day in the peak season

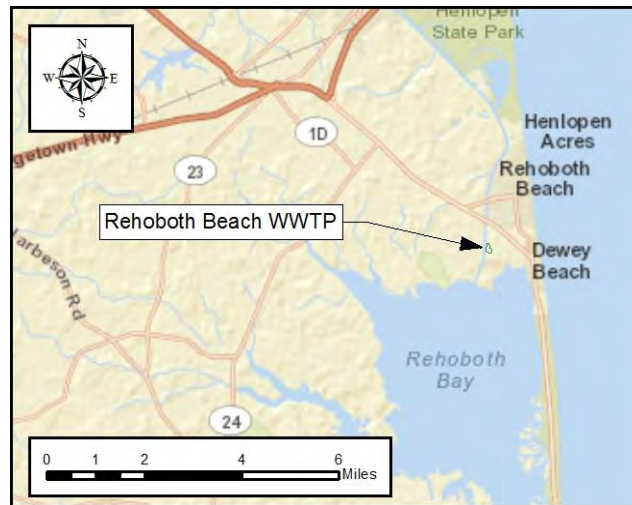

Rehoboth Beach Wastewater Treatment Plant History

- Constructed in 1989
- Upgraded in 1990's for Biological Nutrient Removal (N and P)
- Original discharge to the Lewes-Rehoboth Canal
 - Empties into Inland Bay
- Listed as “water quality impaired” – 1996
 - Nitrogen and Phosphorus Impacts
- TMDL issued in 1998
 - Requiring “all point source discharges and their tributaries to be eliminated systematically”
- Consent Order and Revised Discharge Permit required discharge to be eliminated from Inland Bay

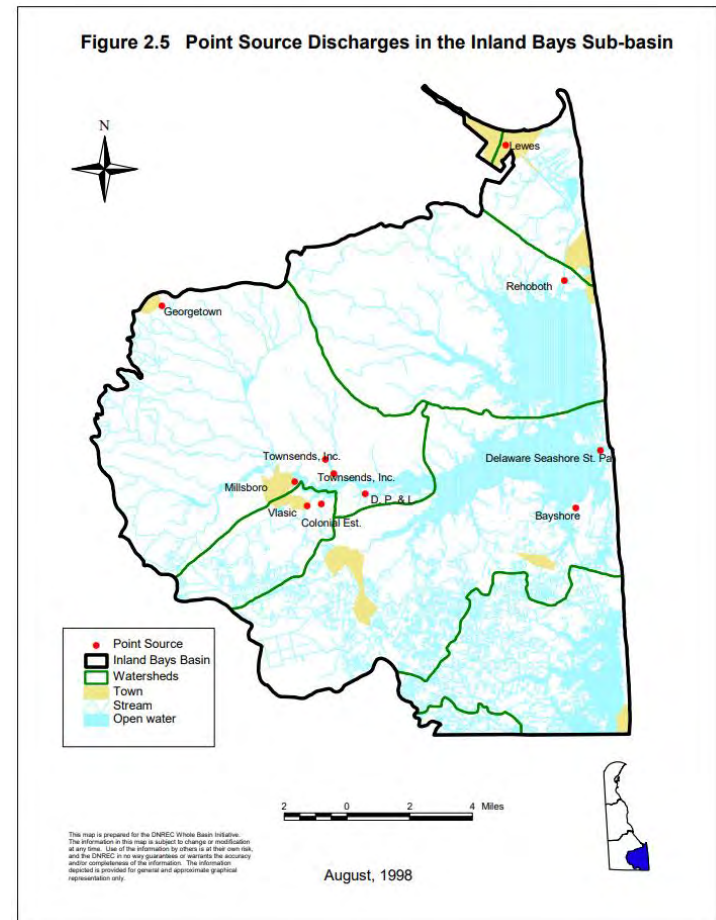

Planning

Alternatives Considered

Alternative 1: No Action


Alternative 2: Nutrient Trading

Alternative 3: Land Application

Alternative 4: Rapid Infiltration Beds (RIBs)

Alternative 5: Ground Water Injection

Alternative 6: Ocean Outfall

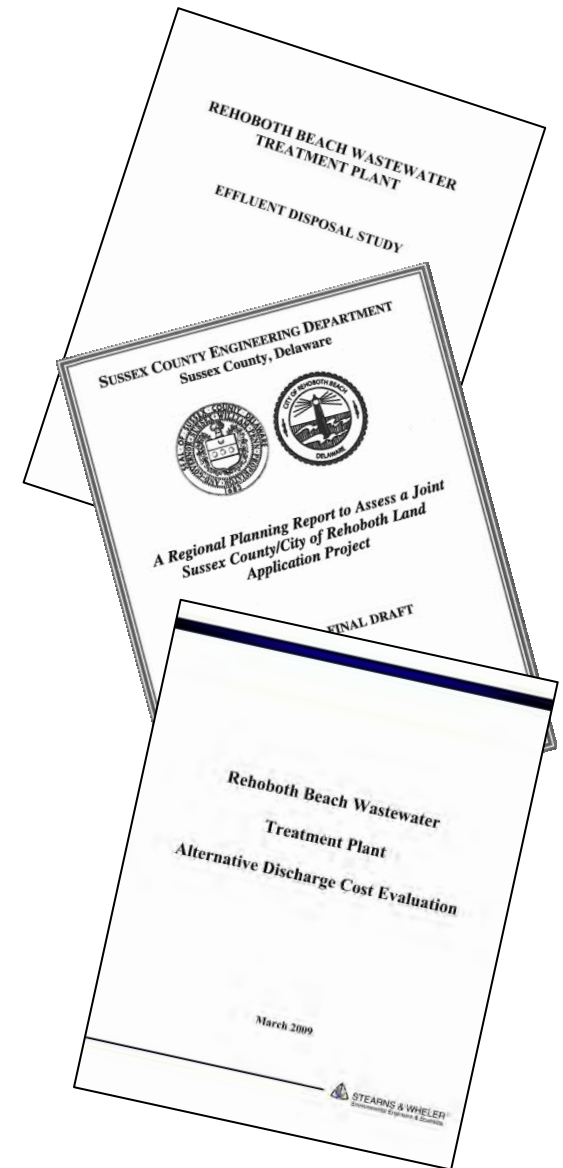

Alternatives Not Carried forward

Alternative 2: Nutrient Trading

- Only allowable if no other options are technically or economically feasible (Consent Order)

Alternative 4: Rapid Infiltration Beds

- Land not available
- Potential to contribute nutrients through groundwater migration
- Potential for groundwater mounding

Alternative 5: Ground Water Injection


- Shallow
 - Potential to contribute nutrients through groundwater migration
- Deep
 - Excessive risk and cost
 - No qualified local contractor

Alternatives Considered in Environmental Impact Statement (EIS)


Alternative 1: No Action



Alternative 3: Land Application

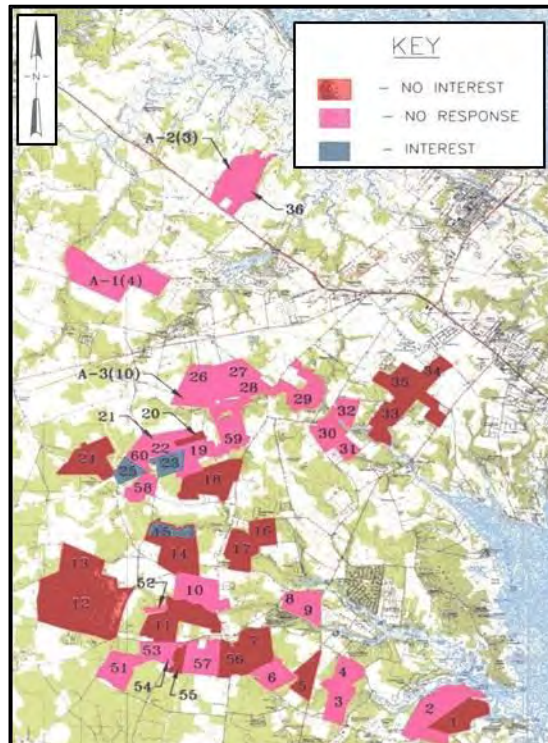

Alternative 6: Ocean Outfall

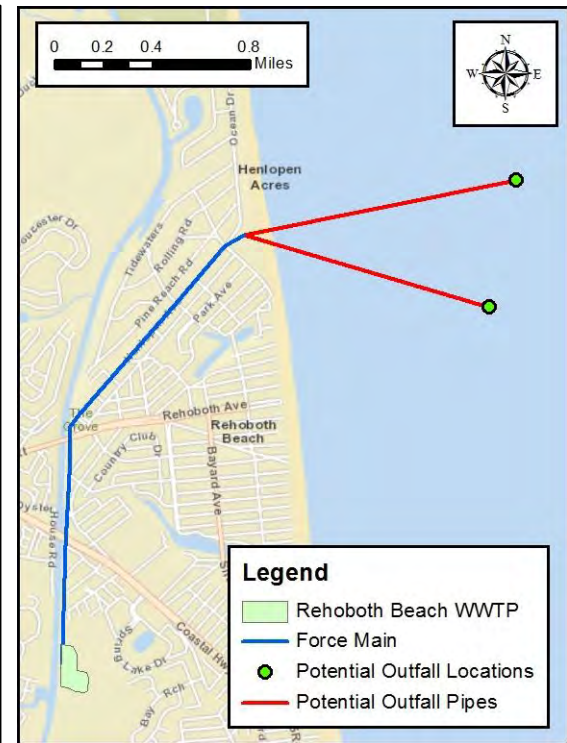

Force Main

Proposed Force Main Alignment

- Force Main Alignment Study completed in December 2011
- 11,400 linear feet long, 24-inch diameter
- Will predominately follow existing utilities and right of ways

Construction Methods

- 9,150 linear feet open cut
- 2,250 linear feet near Grove Park directionally drilled




Ocean Outfall

Proposed Ocean Outfall

- Two locations investigated
- 24-inch diameter pipe extending 6,000 linear feet from the Deauville Beach access parking lot
- Terminates with diffuser

Construction Methods

- 3,000 feet or more of pipe will be directionally drilled
- Directional drilling maximized to minimize environmental impact
- Remainder open cut excavation

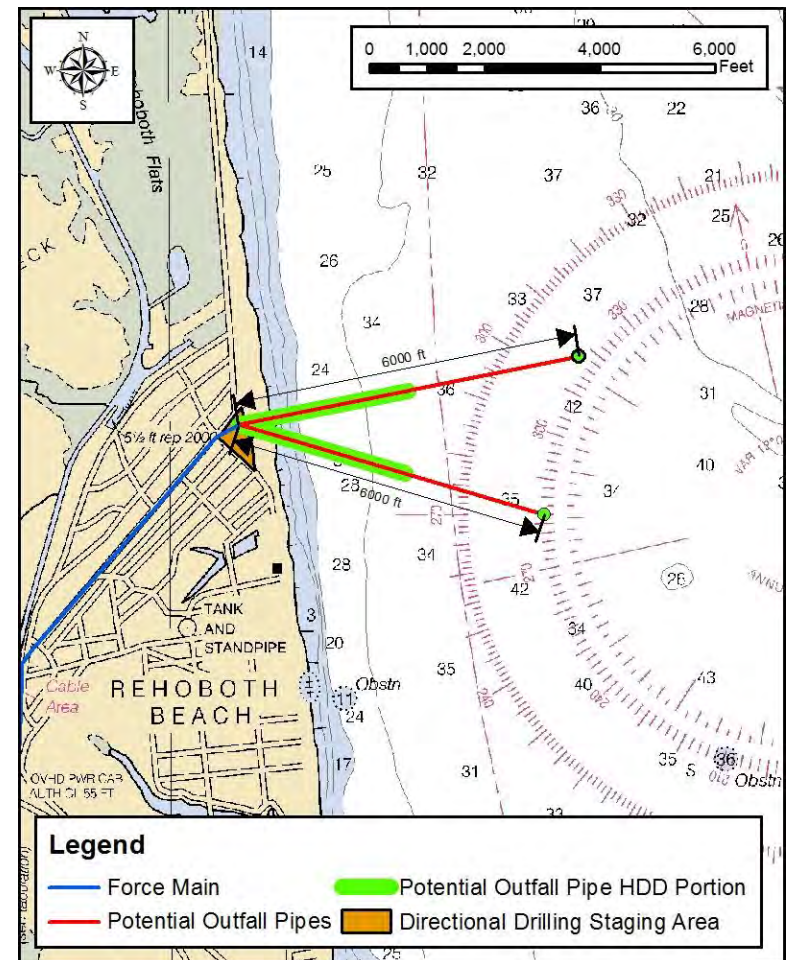


Field Studies

Soil borings

- 1500, 3000, 4500 and 6000 feet from shore
- Each drilled to a depth of 80 ft
- High probability that HDD portion could extend beyond 3,000 feet

Archaeological Survey


- Magnetometer and side-scan sonar
- Most anomalies suggest debris or buoys
- Several potential targets but not near northern outfall

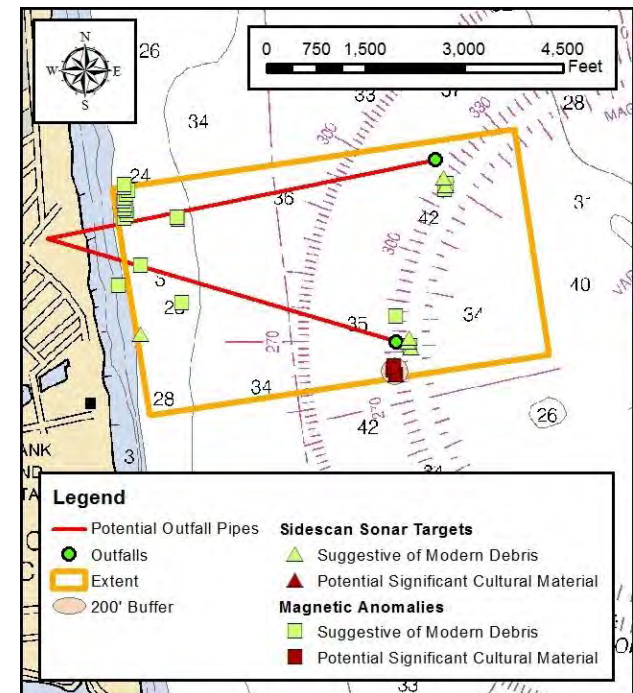

Physical Oceanography

Acoustic Doppler Current Profiler (ADCP) & Fixed Conductivity, temperature, density (CTD) buoys

- Deployed at each outfall location for two 2-month periods
 - 9/2/2010 to 11/9/2010
 - 7/6/2011 to 9/12/2011
- ADCP Data recorded at 1.6 ft (0.5 m) increments
 - Current speed & direction – every 10 min
 - Wave height – every 60 min
- CTD data recorded at three or four different depths every 10 minutes

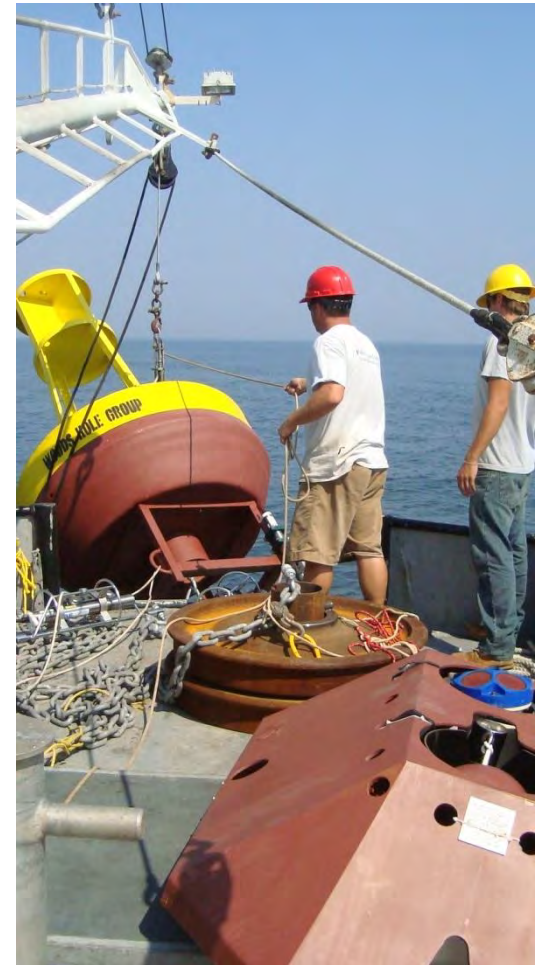

Physical Oceanography

CTD Cruises

- Conductivity, temperature, density, and salinity measured at multiple locations
- Recorded at approximately 1 ft depth increments from ocean surface to ocean floor

CTD Cruise

Date

CTD Cruise #1

Nov. 18, 2010

CTD Cruise #2

Jan. 25, 2011

CTD Cruise #3

March 17, 2011

CTD Cruise #4


May 25, 2011

CTD Cruise #5


July 11, 2011

CTD Cruise #6

Sept. 14, 2011

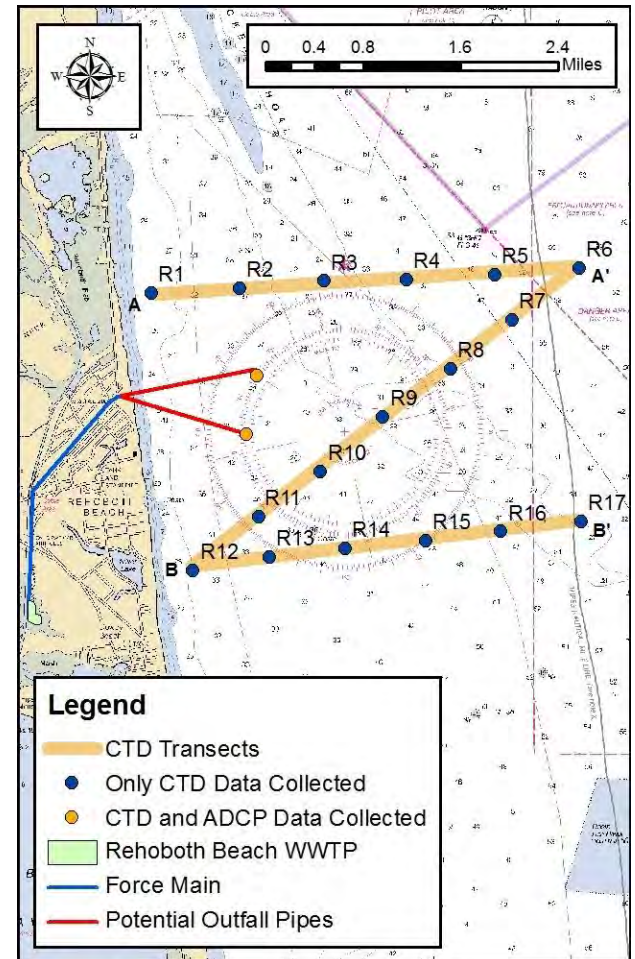


Far Field Model – Modeling Domain

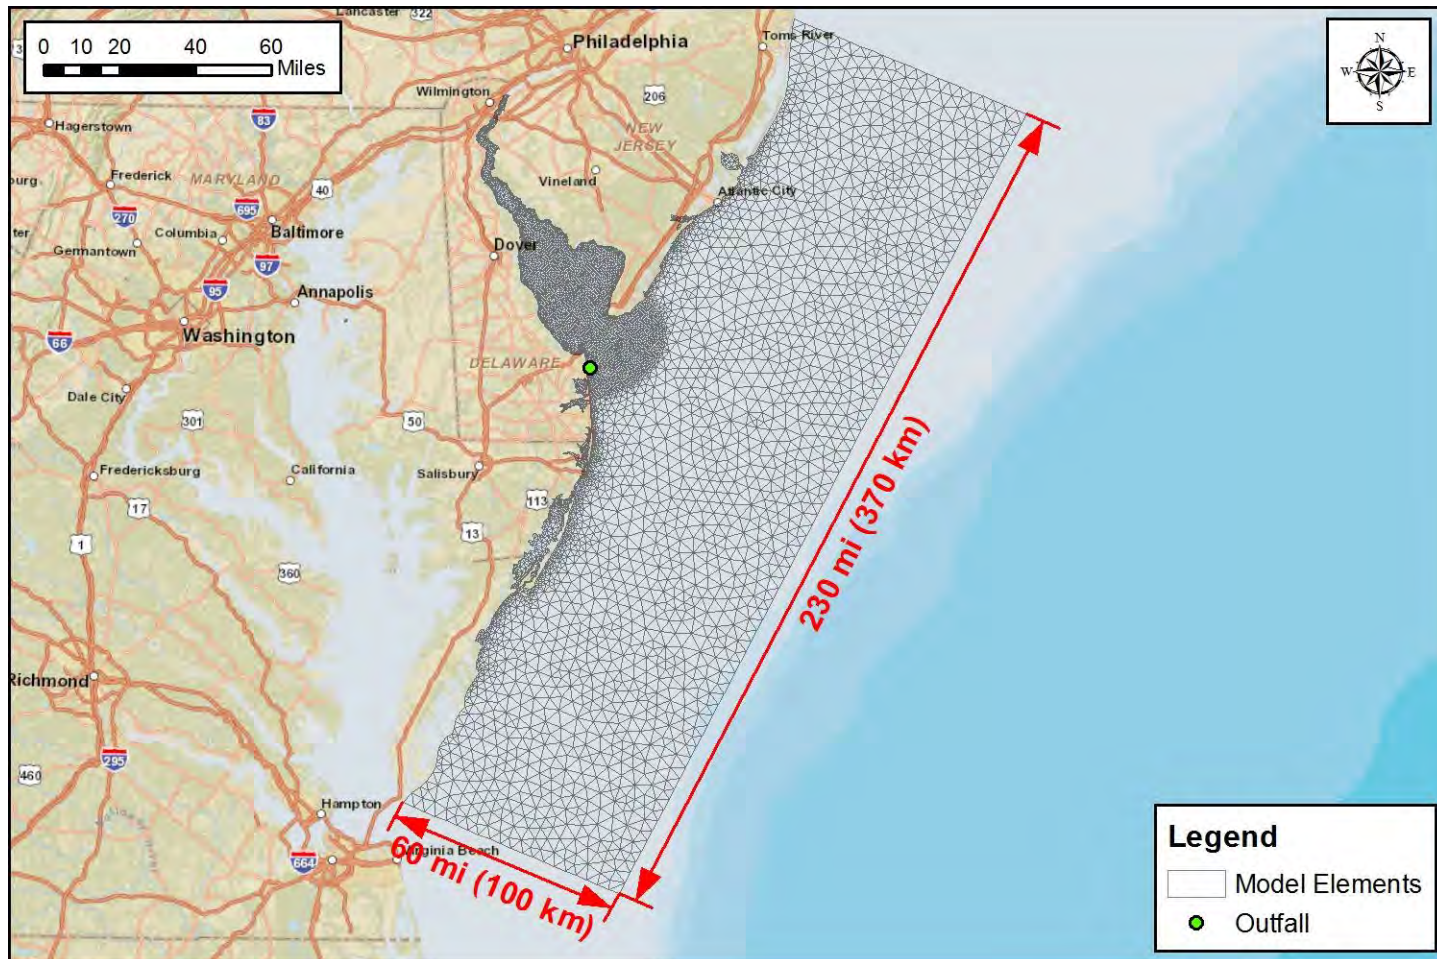

Far Field Modeling Results

- Modelling indicated required effluent dilution ratios met for:
 - Typical operations
 - Worst case scenario (plant upset)

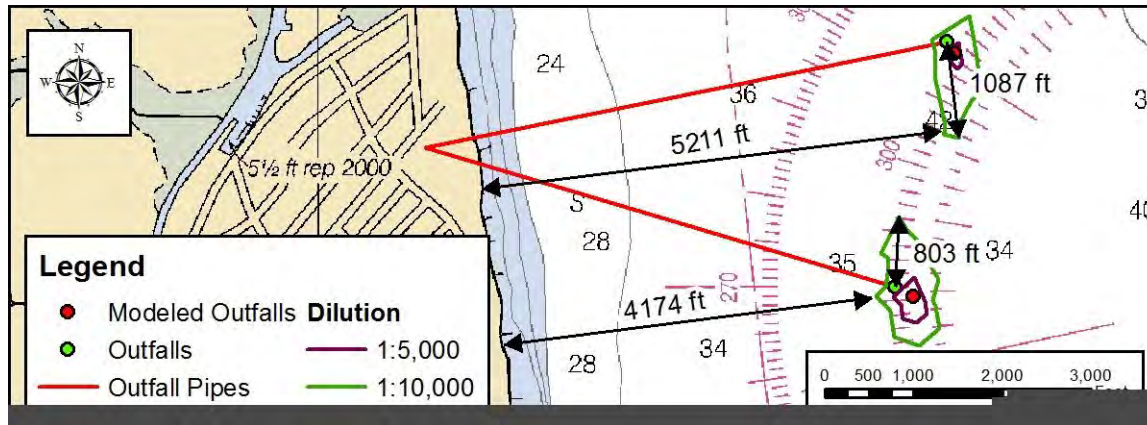

Environmental Consequences

- Physical Environment (Chapter 7 of EIS)
- Biological Environment (Chapter 8)
- Human Health Environment (Chapter 9)
- Cumulative Impacts (Chapter 10)



Rehoboth Beach EIS



Concluding Remarks

- Both land application and ocean outfall are protective of human health and the physical and biological environment under all conditions
- Environmental Impacts, where present, are temporary and can be mitigated
- Preferred alternative is the ocean outfall




Environmental Impact Statement – Review Agencies

- City of Rehoboth Beach
- Delaware Department of Natural Resources and Environmental Control (DNREC)
- US EPA
- US Army Corps of Engineers
- Sussex County
- Coast Guard
- Concerned Citizens



Birth and Development of the EIS

February 2010	JPPM Meeting
March 2010	DNREC Meeting
June 2010	DNREC Meeting
July 2010	JPPM Meeting
September 2010	EIS Public Scoping Meeting
March 2011	EIS Review Meeting
June 2011	EIS Review Meeting
June 2011	JPPM Meeting for FM
September 2011	EIS Review Meeting
March 2012	Draft EIS Completed
April 2012	Public Meeting
July 2012 to April 2013	Final EIS Development

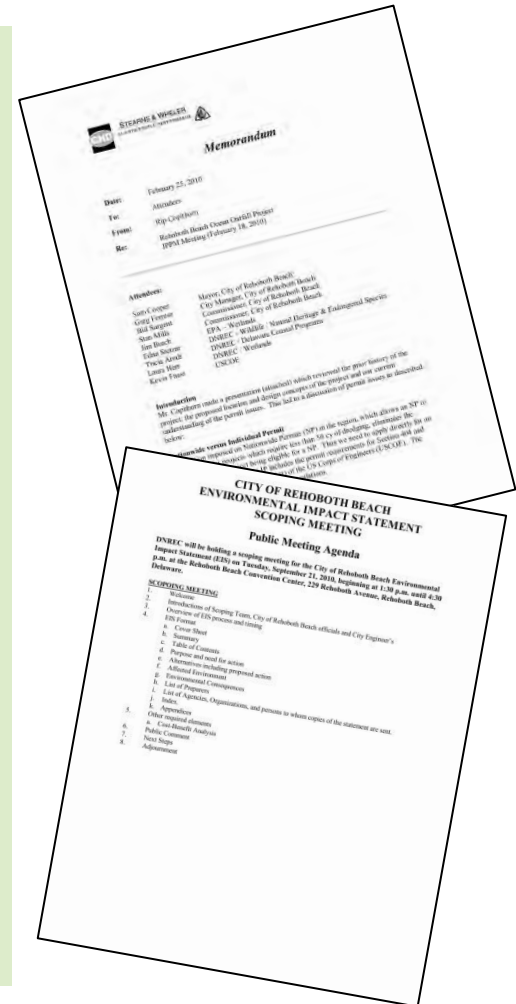

Design

Ocean Outfall Design and Construction

- The Ocean Outfall was one of 3 projects occurring simultaneously.
- Forcemain: 24” PVC Treated Effluent Force Main, including a section of Jack and Bore under Rehoboth Avenue, with a total length of 11,300 linear feet.
- Effluent Pumpstation with 4 vertical turbine pumps through the forcemain and outfall.
- All three projects need to be completed by June 1, 2018 per Consent Order from DNREC




Design- Ocean Outfall

Proposed Ocean Outfall


- 24-inch diameter pipe extending 6,000 linear feet from the Deauville Beach access parking lot
- Terminates with diffuser

Construction Methods

- 3,000 feet or more of pipe will be directionally drilled
- Directional drilling maximized to minimize environmental impact
- Remainder open cut excavation

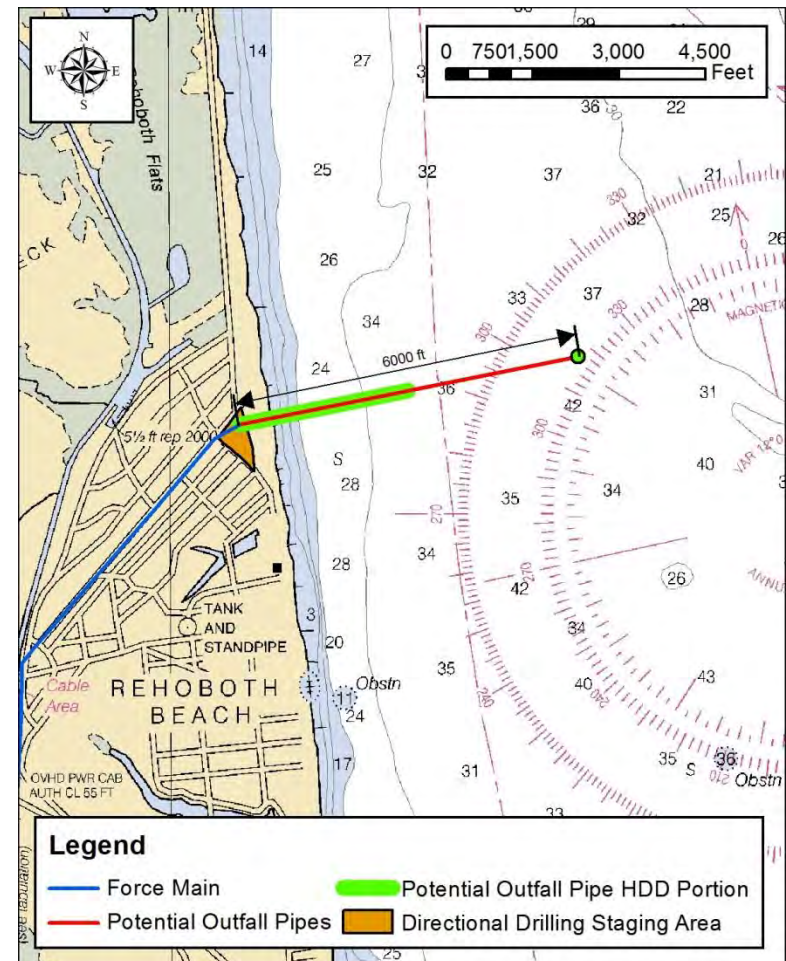

Ocean outfall design considerations - site characterization profile

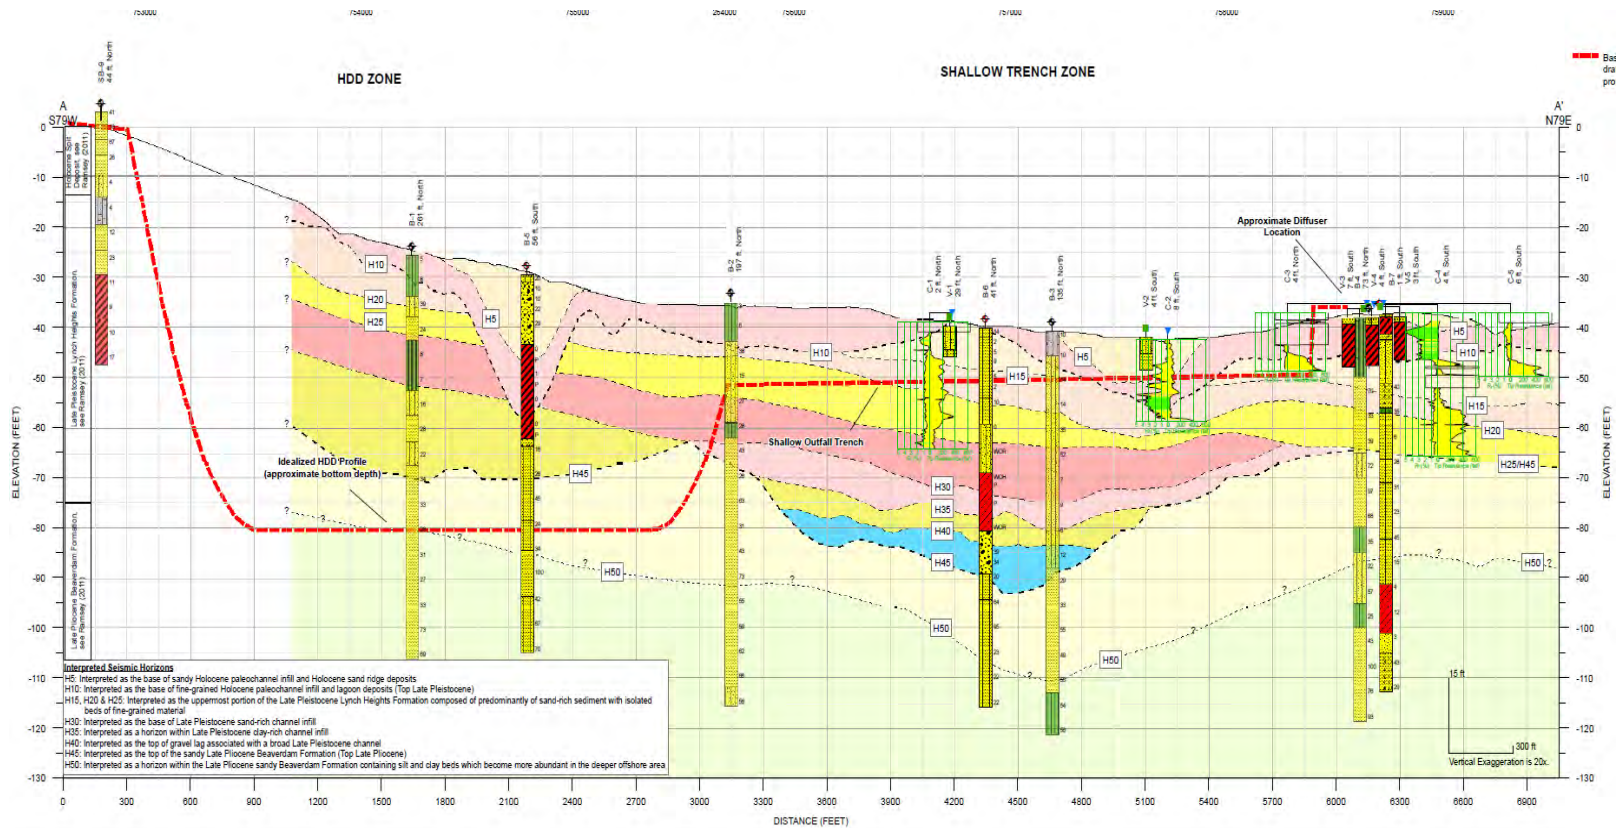

Construction

Ocean outfall construction timeline & costs

Permits and schedule

- Construction was constrained to Fall, Winter and Spring (7 month construction period)

Ocean Outfall Construction Cost

- \$28.1 M

Significant Days	Date
Notice to Proceed	9/5/2017
USACE Window Expiration	2/28/2018
DNREC Window Expiration	3/15/2018
Marine Work Completion	3/31/2018
Project Completion	4/30/2018




Weather Impacts

- Construction was initially constrained to Monday to Friday, 7:00 AM to 6:00 PM
- Working hours were changed to 7 days per week, 24 hours per day to meet schedule



Nor'easter takes a bite out of Delaware beaches, leaving 'significant' erosion

, rghughes@delmarvanow.com Published 12:36 p.m. ET March 22, 2018 | Updated 5:04 p.m. ET March 22, 2018

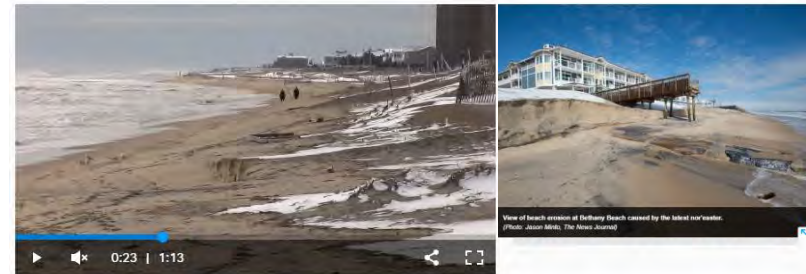

Contractor Staging



Horizontal Drilling at Deauville Beach



Offshore Staging at Cape Henlopen

HDD Installation

- Pilot hole advanced from land to reduce offshore equipment support
- Outfall pipe pulled from ocean to shore
- Pullback took ~ 24 hours





Ocean Outfall Cross-section – Open Cut



ACB Mat Placement




Diffuser Placement

Precast grade beam for diffuser support



Diffuser Placement

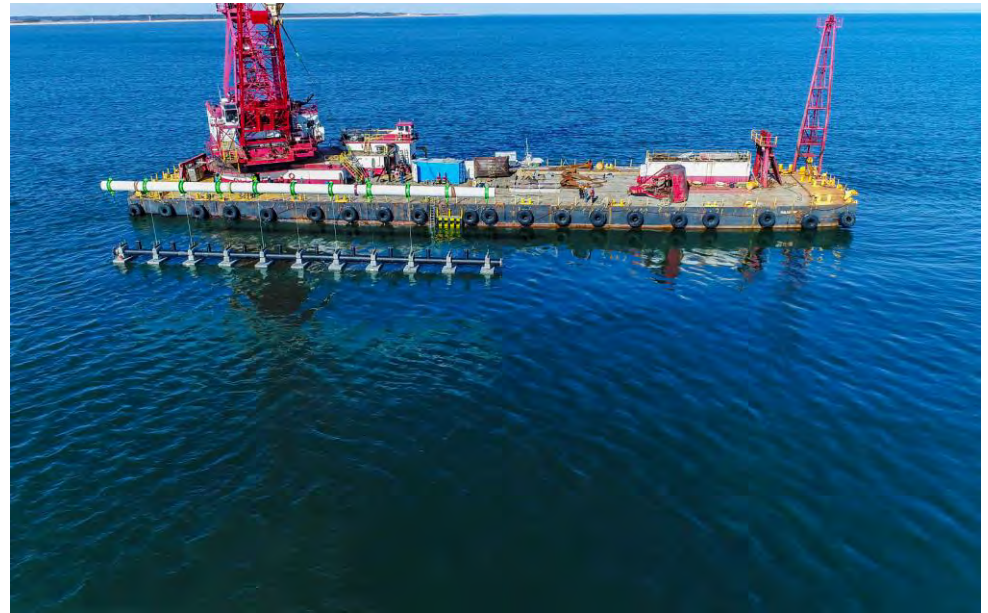

General lessons learned

- The weather is the number one enemy for an offshore project.
- Make allowance for adequate number of weather delay days in the contract.
- Be flexible with working hours
- Always be aware of unforeseen conditions.

Summary

- Ocean outfall can be a feasible alternative for watershed nutrient management
 - Relatively small land area required
 - Effluent discharge occurs outside impacted watershed, greatly reducing nitrogen loading impacts to coastal estuaries
- Hydrodynamic modelling required to determine effluent nutrient load fate
- Extensive permitting period anticipated
- Extensive public outreach / participation critical for a successful project



Questions

Anastasia.Rudenko@ghd.com
Lenna.Quackenbush@ghd.com

NEWEA 2020